



K780 MULTI-DEVICE KEYBOARD


One keyboard. Fully equipped. For computer, phone, and tablet.




EXPLORE THE K780
MULTI-DEVICE
KEYBOARD



GET STARTED



ENHANCED FUNCTIONS



DUAL LAYOUTS

EXPLORE THE K780 MULTI-DEVICE KEYBOARD

The K780 Multi-Device Keyboard is a fully equipped computer keyboard that also works perfectly with smartphones and tablets. Enjoy quiet, comfortable typing, switching easily between all the devices you enter text on. Works with Windows, Mac, Chrome OS, Android and iOS.

To enhance your experience on Mac OS and Windows, download [Logitech Options](#). In addition to optimizing the keyboard for your preferred operating system, the software lets you customize the K780 according to your individual needs.

[Logitech Options](#)



K780 Multi-Device Keyboard at a glance



- 1 Easy-Switch keys
- 2 Dual-printed layout
- 3 Integrated device stand
- 4 Battery door and receiver storage




GET CONNECTED

The K780 Multi-Device keyboard allows you to connect up to three devices either via Bluetooth Smart or via the pre-paired Unifying USB receiver*.

Quick Setup

Follow the steps below to quickly connect to your computer, laptop or tablet. For more information on how to connect with Unifying or Bluetooth Smart, go to the sections below.

* The Unifying receiver is stored in the keyboard under the battery door.

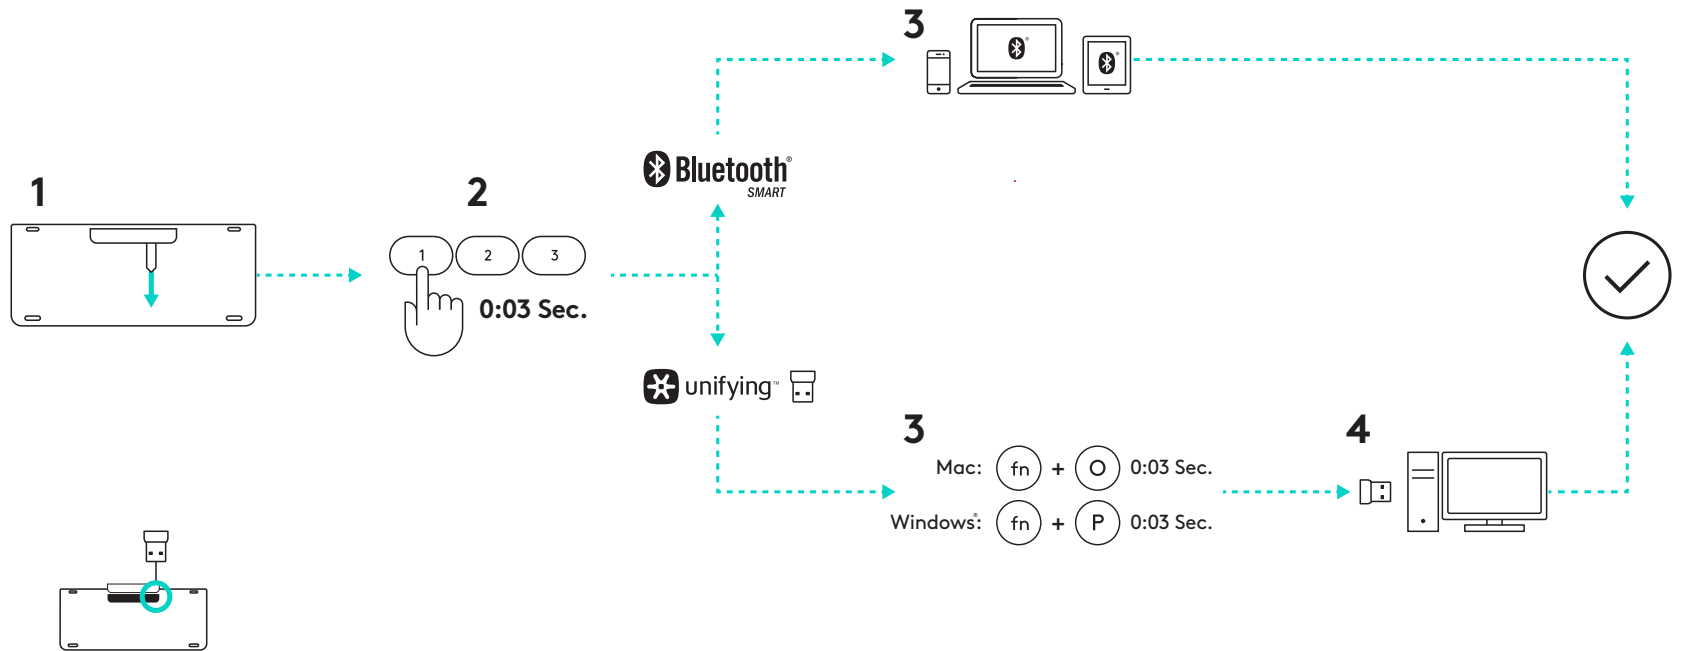

Dual Connectivity

The K780 lets you connect up to three devices (computers, laptops, tablets or smartphones) either via the Unifying receiver (2.4 Ghz) or Bluetooth Smart.



Connect with unifying

The K780 Multi-Device comes with a pre-paired receiver that provides a plug-and-play connection to your computer or laptop.

You'll need the following to use the Unifying receiver:

Requirements

A USB port

Unifying Software

Windows 7, Windows 8, Windows 10 or later

Mac OS X 10.10 or later

Chrome OS

If you want to pair a second time to the receiver in the box or pair to an existing Unifying receiver, follow these steps.

How to connect

- 1 Download Unifying software. You can download the software [here](#).
- 2 Make sure your keyboard is turned on.
- 3 Press and hold one of the white Easy-Switch keys for three seconds. (The LED on the selected channel will rapidly blink.)
- 4 Configure your keyboard according to your operating system:
For Mac OS: Press & hold fn + O for three seconds. (The LED on selected channel will light up.)
For Windows, Chrome or Android: Press & hold fn + P. for three seconds. (The LED on selected channel will light up.)
- 5 Plug in the Unifying receiver.
- 6 Open the Unifying software and follow the instructions on the screen.

Connect with Bluetooth[®] SMART

The K780 Multi-Device Keyboard allows you to connect via Bluetooth Smart. Please ensure your device is Bluetooth Smart ready and runs one of the following operating systems:

Requirements

Windows 8 or later

Mac OS X 10.10 or later

iOS 5 or later

Android 5.0 or later

Chrome OS

How to connect











- 1 Make sure your K780 Multi-Device is turned on and Bluetooth is enabled on your computer, tablet or phone.
- 2 Press and hold one of the Easy-Switch keys for three seconds. (The LED on the selected channel will blink rapidly.)
- 3 Open Bluetooth settings on your device and pair with “Keyboard K780”.
- 4 Type the on-screen password and press enter or return.

ENHANCED FUNCTIONS

The K780 Multi-Device has a number of enhanced functions to get even more out of your new keyboard. The following enhanced functions and shortcuts are available.

Hot keys and media keys








The table below shows hot keys and media keys available for Windows, Mac OS, Android, and iOS.

Keys	 F4	 F5	 F6	 F7	 F8	 F9	 F10	 F11	 F12	
Windows 10	Browser home page	Contextual menu*	Back in browser	Prev track	Play/pause	Next Track	Mute	Volume down	Volume up	Cortana search
Windows 7, Windows 8	Browser home page	Contextual menu*	Back in browser	Prev track	Play/pause	Next Track	Mute	Volume down	Volume up	Search
Android	Home	Menu	Back	Prev track	Play/pause	Next Track	Mute	Volume down	Volume up	Search
iOS	Home	Show/hide virtual keyboard	Home	Prev track	Play/pause	Next Track	Mute	Volume down	Volume up	Search
Mac OS	Mission Control	Dashboard*	Back in browser*	Prev track	Play/pause	Next Track	Mute	Volume down	Volume up	Search

* Requires installation of Logitech Options software

Shortcuts

To perform a shortcut, hold down the fn (function) key while pressing the key associated with an action. The table below shows function key combinations for the different operating systems.

Keys							
Windows 10	Insert	Print screen	Lock screen	Home (when editing text)	End (when editing text)	Page up	Page down
Windows 7, Windows 8	Insert	Print screen	Lock screen	Home (when editing text)	End (when editing text)	Page up	Page down
Android	-	Print screen	Lock screen	Home (when editing text)	End (when editing text)	Page up	Page down
iOS	Language switch	Screen Capture	Lock screen	Selects text to the left from the current cursor position	Selects text to the right from the current cursor position	Brightness up	Brightness down
Mac OS	Language switch	Print screen	Lock screen	Selects text to the left from the current cursor position	Selects text to the right from the current cursor position	Brightness up	Brightness down

* Requires installation of Logitech Options software

DUAL LAYOUT

Unique dual-printed keys make the K780 keyboard compatible across different operating systems (e.g. Mac OS, iOS, Windows, Chrome, Android). Key label colors and split lines identify functions or symbols reserved for different operating systems.

Key Label Color

Gray labels indicate functions available on Apple devices running Mac OS or iOS.

White labels on gray circles identify symbols reserved for use with Alt Gr on Windows computers.

Split keys

Modifier keys on either side of the space bar display two sets of labels separated by split lines. The label above the split line shows the modifier sent to a Windows or Android device.

The label below the split line shows the modifier sent to an Apple computer, iPhone, or iPad. The keyboard automatically uses modifiers associated with the currently selected device.

How to configure your keyboard

To configure the layout according to your operating system, press one of the following shortcuts for three seconds.


iOS fn + I

Mac OS fn + O

Windows fn + P

The LED on selected channel will light up to confirm when the layout has been configured.

NOTE: If you connect in Bluetooth Smart, this step is not necessary. OS Detection will automatically configure the layout.

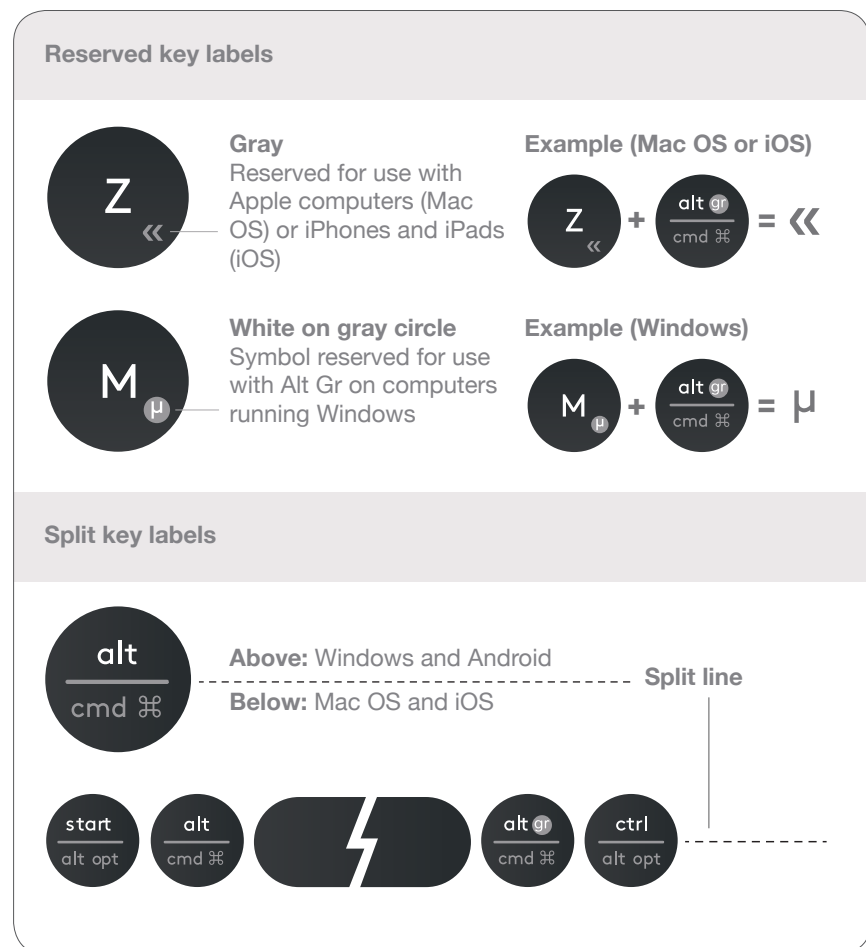

To select an OS	Hold down key combination for 3 seconds
iOS	fn + I
macOS	fn + O
Windows	fn + P

© 2016 Logitech. Logitech, Logi, and other Logitech marks are owned by Logitech and may be registered.

The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Logitech is under license.

All other trademarks are the property of their respective owners.